





ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2024/01/01	JIM.KING

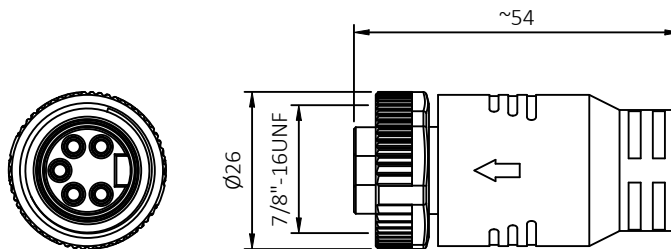

Wire List

PIN 1	_____	N/C
PIN 2	_____	N/C
PIN 3	_____	N/C
PIN 4	_____	1/4W 120Ω Resistor
PIN 5	_____	

General Specifications:

Connector : 7/8"-16UNF 5P Female
 Locking: Screw Connection
 Termination: Solder Cup

Electrical:

Rated Voltage: 300V AC/DC
 Rated Current: 8A
 Contact Resistance: $\leq 5m\Omega$
 Insulation Resistance: $\geq 100M\Omega$

Mechanical:

Mating Cycles: min 500
 Temperature Range: -25 to 80° C
 Degree of Protection: IP67

Material:

Coupling nut: Zinc Alloy, Electroless Nickel
 Insulator: TPU black
 Contacts: Brass, Gold Plated
 Seal: Rubber, black
 Body Molding: PVC, Yellow
 Resistor :1/4W 120Ω ±1%

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC GROUP				
	PART DESCRIPTION: 7/8" 5P Female Terminator				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr:	P/N:			
	Check:	Date	Scale	Unit	Type
	Draw:	2024.01.01	Free	MM	Z
	JIM.KING	RHT-634-3398			
	DING				1/1